



Enzo Panzeri 2015



Floor lighting fixture for interiors, with swivelling light beam.
 Pickled sheet metal bearing base in polyacrylic paint.
 Extruded aluminium frame in matt white, black, red or titanium polyacrylic paint.
 Die-cast aluminium joints in polyacrylic paint.
 Steel wire rope slings.
 Die-cast aluminium head rotating on two axes in polyacrylic paint.
 Acrylic diffuser with double serigraphy.
 Push-button to adjust luminosity according to 5 levels of visual comfort.
 Equipped with a 2,3m (90,6") long power cable with USB connector and adapter plug.




TECHNICAL DATA




Code	T07702.000.0409
System power consumption	10W
Efficacy	52.6lm/W
Light source	LED
Light source lifetime	L90 (B10) 50000h
Colour temperature	3000K Ra >90
Light distribution	adjustable
Apertura fascio	90°
Power supply	220-240V AC
Frequency	50/60Hz
Electrical configuration	dimmable (Step DIM)
Driver	integrated included
Nominal luminous flux	600lm
Lumen output	526lm
Efficiency	87.667%
Weight	5,1040Kg
Protection degree	IP40
Colour tolerances	SDCM3

POLAR DIAGRAM

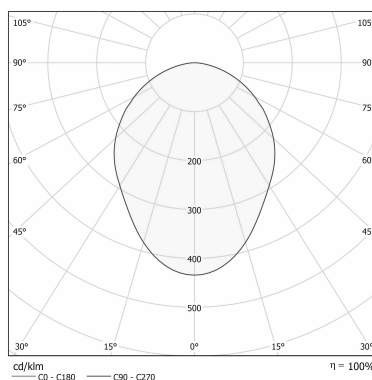

TECHNICAL DRAWING

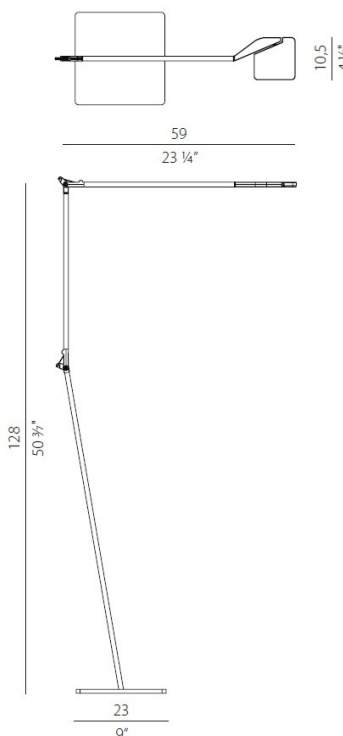

COLOUR

black

